

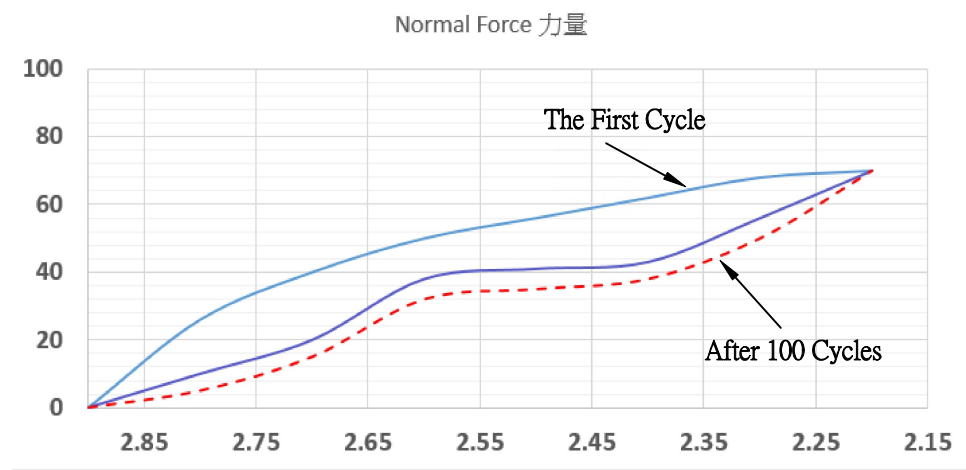
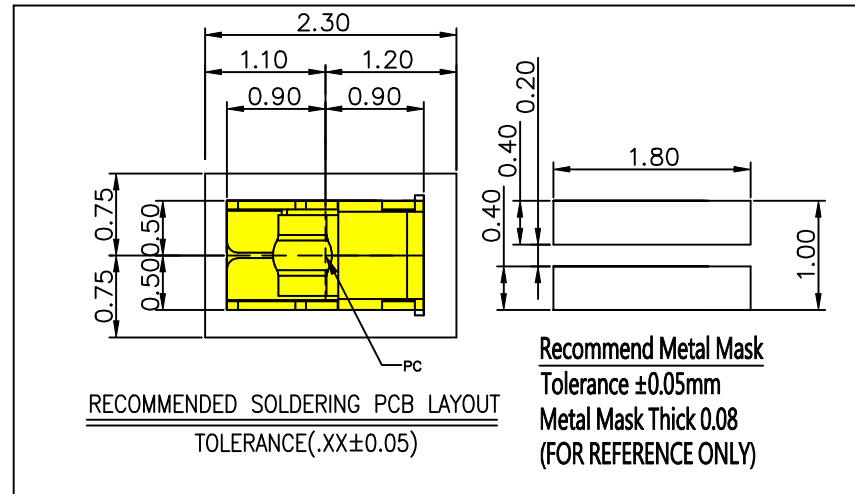
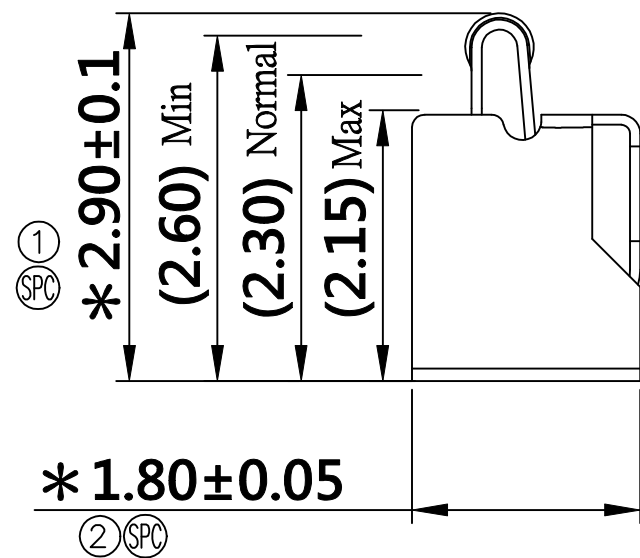
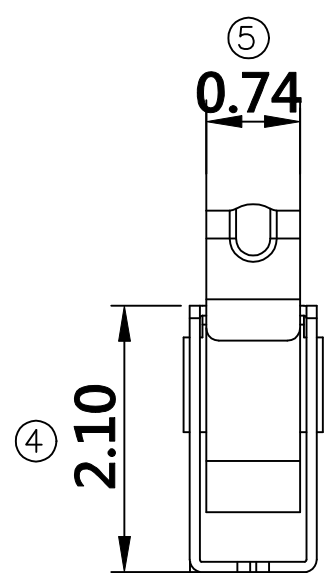


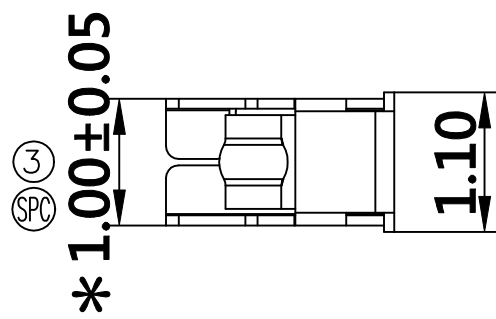

Note:

- 1.Material: Stainless Steel Thickness 0.08 mm
- 2.Electroplate: Nickel underplating over all , Au >1u" plating on contact area& solder area
- 3.Electrical Characteristics:
 - a. Current Voltage: 12V
 - b. Current Rate: 3A
 - c. Contact Resistance; Normal Compression <50mΩ
- 4.Working Height of Application: 2.15~2.60mm
- 5.Spring Force Tolerance is ±20gf
- 6.Operating Temperature: -20℃~+85℃



01	2024-08-13	Force Curve Diagram Updated			
DRAFT	Hardy Hsieh	DATE	2024-08-13	RoHS Compatible	
CHECKER	Robin Liao	DATE	2024-08-14		
APPROVAL	Timothy Chen	DATE	2024-08-15	SHEET	1-2
			SCALE	Not to scale	UNIT
				mm	

TOLERANCE/CLASS			
RANGE(mm)	A	B	C
≤30	±0.10	0.15	0.20
30< ~ ≤120	±0.15	0.20	0.30
120< ~ ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		



EMI STOP CORP.

EMISTOP P/N	CUS P/N
SQT-29Q1G	