

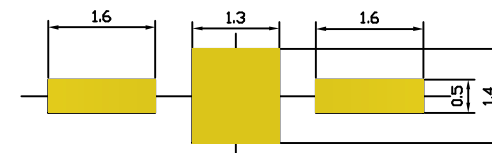
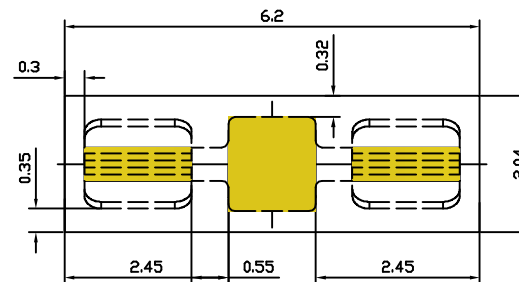
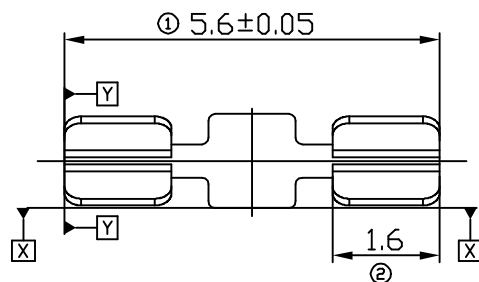

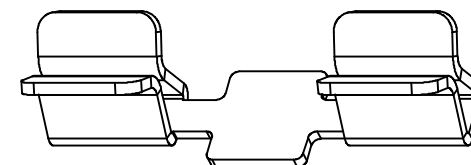



00 03/14-'19

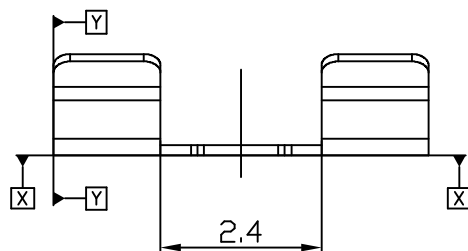

RECOMMENDED SOLDERING PCB LAYOUT
TOLERANCE(.XX±0.05)



Note:

1. Material: Stainless steel Thickness 0.15mm
2. Electroplate:
 - Matte Sn plating on contact area
 - Matte Sn plating on solder area
 - Nickel underplating over all
3. All-purpose shielding cover 0.15mm & 0.20mm

00	03/14-'19	Design creation			
REV	Date	Description			
DRAFT	Robin Liao	DATE	03/14-'19	RoHS Compatible	
CHECKER	Justin Wu	DATE	03/14-'19		
APPROVAL	Jacky Lin	DATE	03/14-'19		
SHEET	1-2	SCALE	Not to scale	UNIT	mm

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30<~ ≤120	±0.15	0.20	0.30
120<~ ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		



EMI STOP CORP.

EMISTOP
SUL-15A9Q1M

CUS P/N