

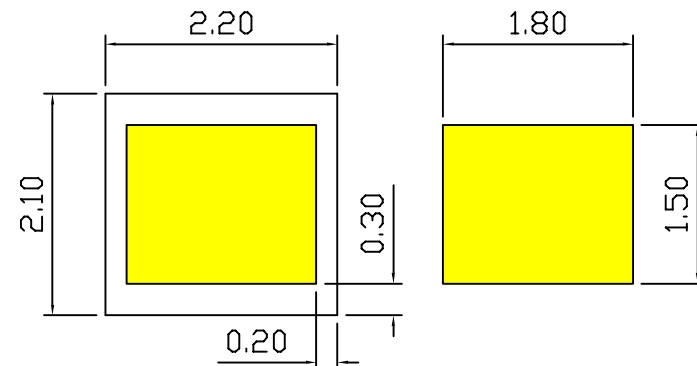
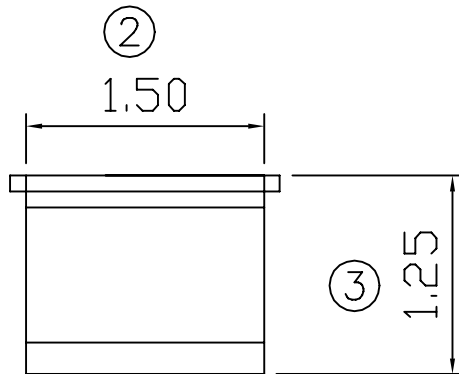
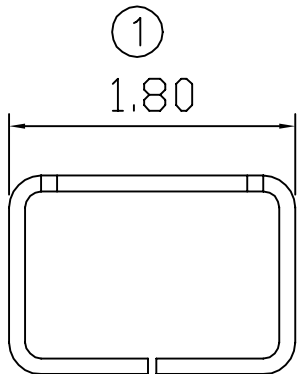


00 04/18-'12



RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)

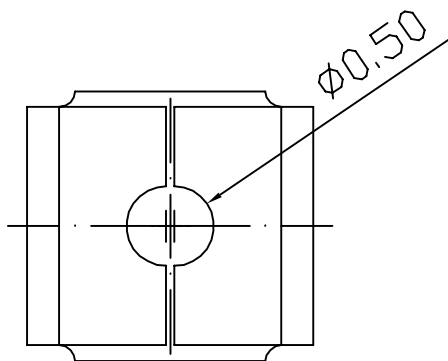

Note:

1. Material: Phosphorus bronze Thickness 0.10mm
2. Electroplate:
Au>1u" on contact area
Au>1u" on solder area
Nickel underplating over all
3. Electrical Characteristics:
3-1 Current Voltage: 12V
3-2 Current Rate: 3A
3-3 Contact Resistance: Normal Compression<30mΩ
4. Operating Temperature: -20℃~+85℃

00	04/18-'12	Design creation			
REV	Date	Description			
DRAFT	Hardy Hsieh	DATE	04/18-'12	RoHS Compatible	
CHECKER	Gabby Weng	DATE	04/18-'12		
APPROVAL	Jacky Lin	DATE	04/18-'12	SHEET	1-2
		SCALE	Not to scale	UNIT	mm
 EMI STOP CORP. EMI STOP					
EMISTOP SQ-12A3G				CUS P/N	

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30<- ≤120	±0.15	0.20	0.30
120<- ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		