

0309-03

②

1.20

③

1.50


①

1.80

0.80


Note:

1. Material: Phosphorus bronze Thickness 0.10mm
2. Electroplate:
Au>1u" on contact area
Au>1u" on solder area
Nickel underplating over all
3. Electrical Characteristics:
3-1 Current Voltage: 12V
3-2 Current Rate: 3A
3-3 Contact Resistance: Normal Compression<30mΩ
4. Operating Temperature: -20℃~+85℃

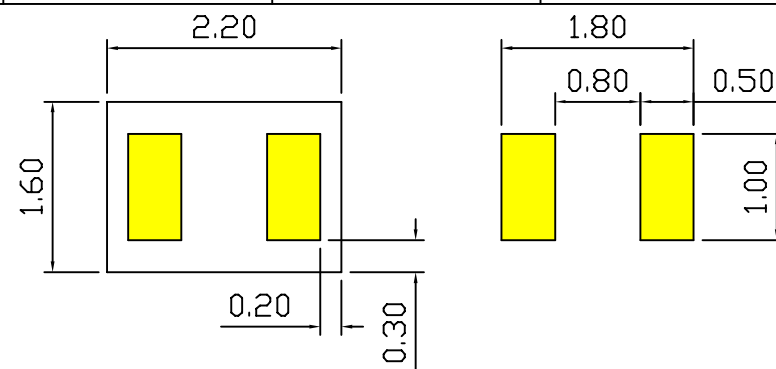

RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)



00	12/03-'09	Design creation				
REV	Date	Description				
DRAFT Justin Wu		DATE 12/03-'09	RoHS Compatible			
CHECKER Benedict Liang		DATE 12/03-'09				
APPROVAL Jacky Lin		DATE 12/03-'09	SHEET 1-2	SCALE Not to scale	UNIT mm	
 EMI STOP CORP.						
EMI STOP						
EMISTOP SQ-15A3G			CUS P/N			

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30<- ≤120	±0.15	0.20	0.30
120<- ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		