
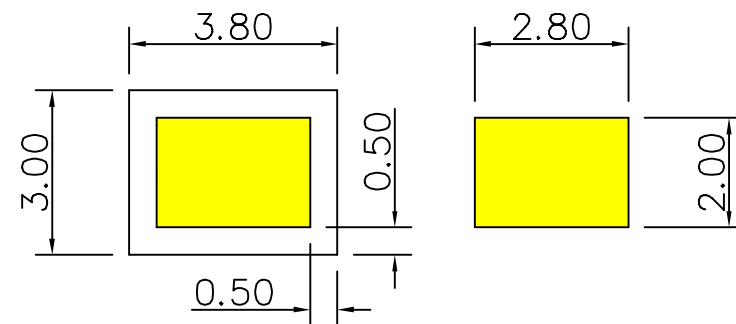


04 07/03

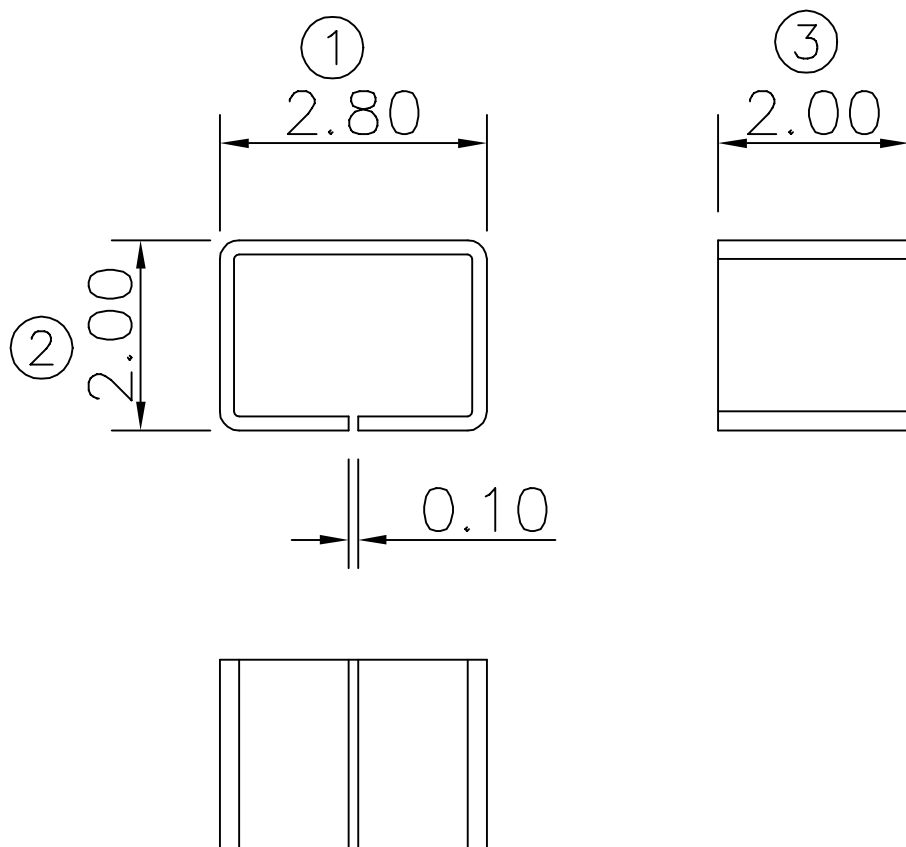


RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)

Note:

1. Material: Phosphorus bronze Thickness 0.15mm
2. Electroplate:
 - Gold Flash on contact area
 - Gold Flash on solder area
 - Nickel underplating over all
3. Electrical Characteristics:
 - 3-1 Current Voltage: 12V
 - 3-2 Current Rate: 3A
 - 3-3 Contact Resistance: Normal Compression<30mΩ
4. Operating Temperature: -20℃~+85℃



00	01/08-'08	Design creation	
REV	Date	Description	
DRAFT	Peggy Lue	DATE	01/08-'08
CHECKER	Jacky Lin	DATE	01/08-'08
APPROVAL	Gary Chen	DATE	01/08-'08
		SHEET	1-2
		SCALE	Not to scale
		UNIT	mm
		RoHS Compatible	
		EMI STOP CORP.	
		EMI STOP	
		EMISTOP	
		S0-20BG	
		CUS P/N	

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30< ≤120	±0.15	0.20	0.30
120< ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		