
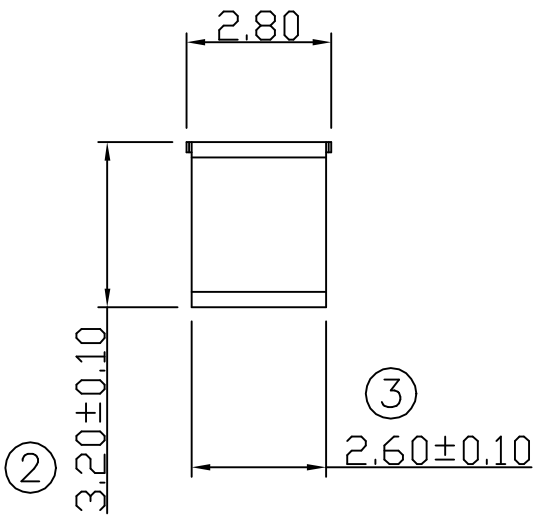
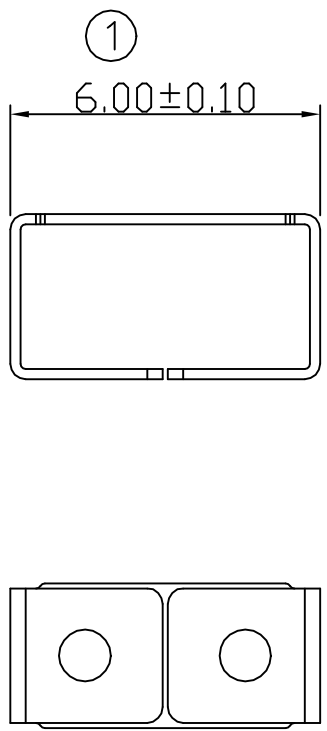


RECOMMENDED SOLDERING PCB LAYOUT
TOLERANCE(.XX±0.05)

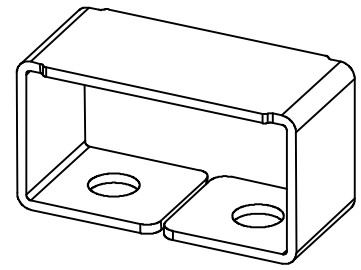

Note:
1. Material: Phosphorus bronze Thickness 0.20mm
2. Electroplate:
 Gold Flash on contact area
 Gold Flash on solder area
 Nickel underplating over all
3. Electrical Characteristics:
 3-1 Current Voltage: 12V
 3-2 Current Rate: 3A
 3-3 Contact Resistance: Normal Compression<30mΩ
4. Operating Temperature: -20℃~+85℃

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30<~ ≤120	±0.15	0.20	0.30
120<~ ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

00	08/28-'08	Design creation				
REV	Date	Description				
DRAFT Sunyo Gi		DATE 08/28-'08	RoHS Compatible			
CHECKER Benedict Liang		DATE 08/28-'08				
APPROVAL Jacky Lin		DATE 08/28-'08	SHEET 1-2	SCALE Not to scale	UNIT mm	
 EMI STOP CORP.						
EMISTOP SQ-32G			CUS P/N			