
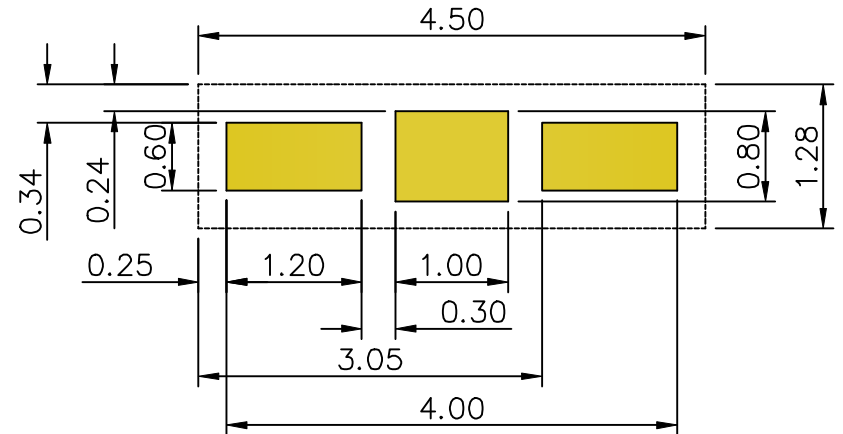
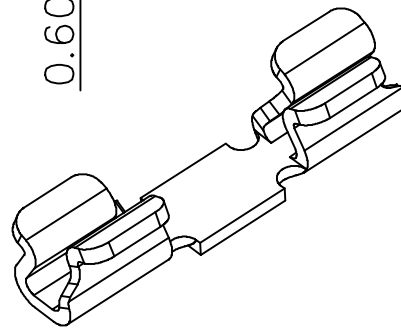
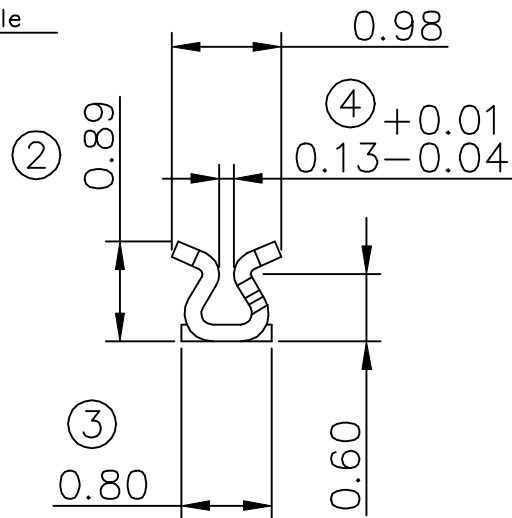
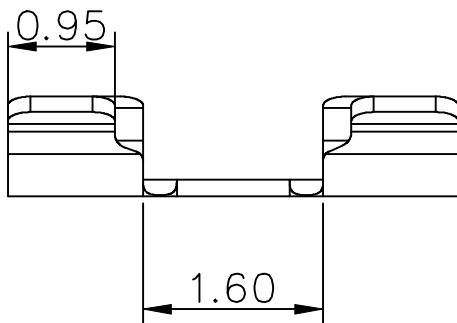


00 10/17-'14

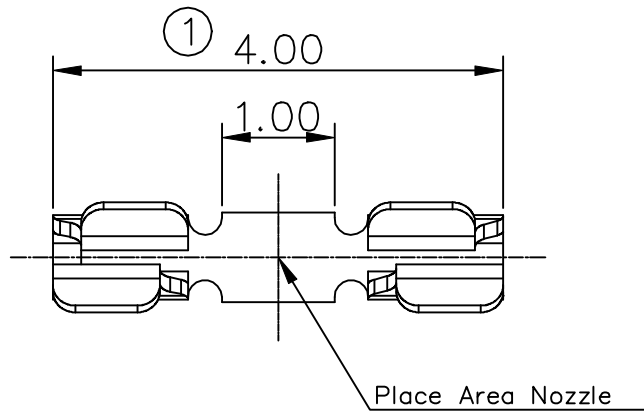

RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)

Note:

1. Material: Stainless steel Thickness 0.15mm
2. Electroplate:
Matte Sn over all
Nickel underplating over all
3. Operating Temperature: -20℃~+85℃
4. Recommended conditions shielding cover 0.15mm



TOLERANCE/CLASS			
RANGE(mm)	A	B	C
≤30	±0.10	0.15	0.20
30< ~ ≤120	±0.15	0.20	0.30
120< ~ ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

00	2014-10-17	Design Creation			
DRAFT	Danny Liao	DATE	2014-10-17	RoHS Compatible	
CHECKER	Gabby Weng	DATE	2014-10-17		
APPROVAL	Jacky Lin	DATE	2014-10-17	SHEET	1-2
		SCALE	Not to scale	UNIT	mm



EMI STOP CORP.

EMISTOP P/N
SUL-08A3M

CUS P/N