





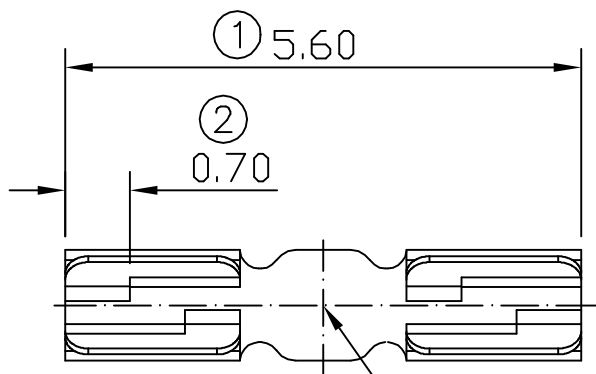


Place Area Nozzle

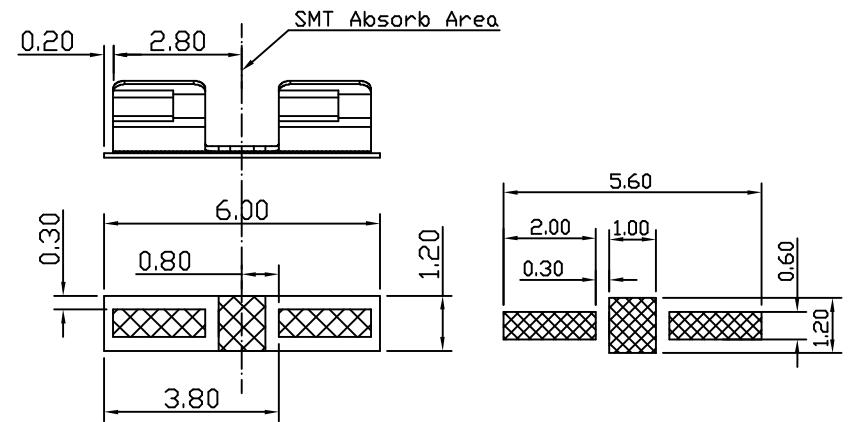

RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)

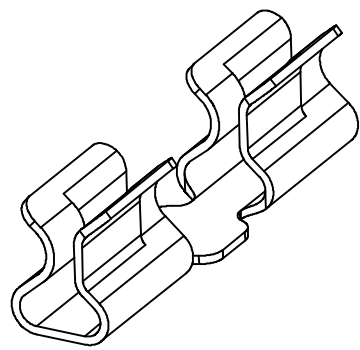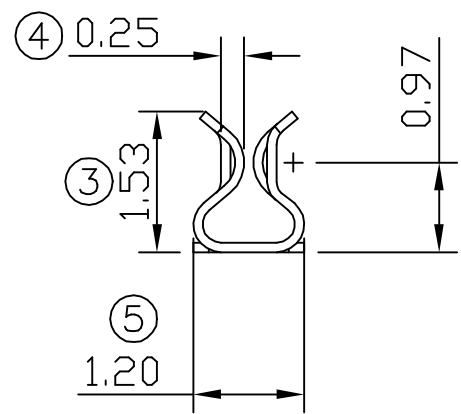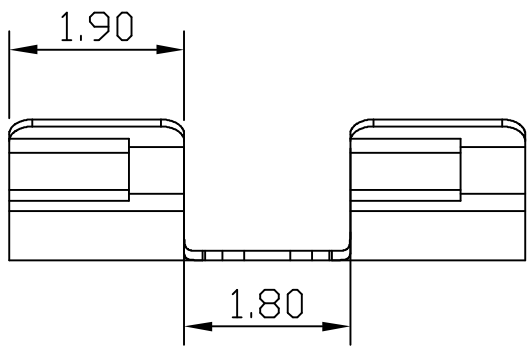

Note:
 1. Material: Stainless steel Thickness 0.10mm
 2. Electroplate:
 Matte Sn over all
 Nickel underplating over all
 3. Operating Temperature: -20℃~+85℃
 4. Recommended conditions shielding cover 0.20mm & 0.30mm

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30<- ≤120	±0.15	0.20	0.30
120<- ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

00	08/31-'10	Design creation			
REV	Date	Description			
DRAFT	Timmy Lai	DATE	08/31-'10	RoHS Compatible	
CHECKER	Benedick Laing	DATE	08/31-'10		
APPROVAL	Jacky Lin	DATE	08/31-'10		
		SHEET	1-2	SCALE	Not to scale
		UNIT	mm		
EMI STOP CORP. EMI STOP		CUS P/N			
		SUL-15A3M			