

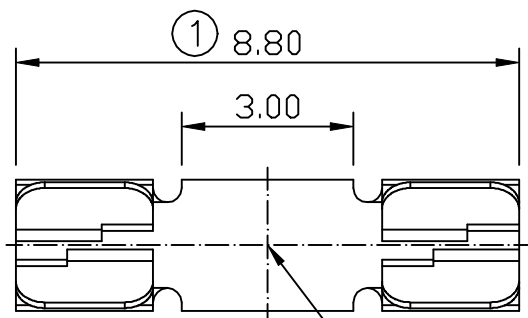
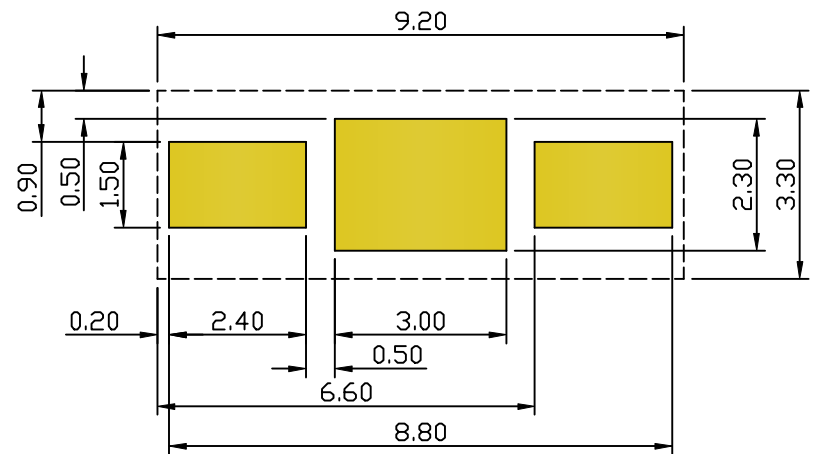


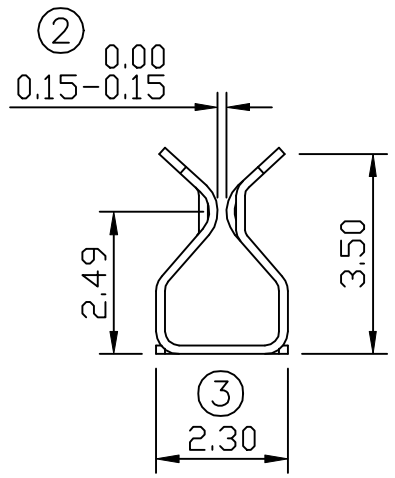


Place Area Nozzle

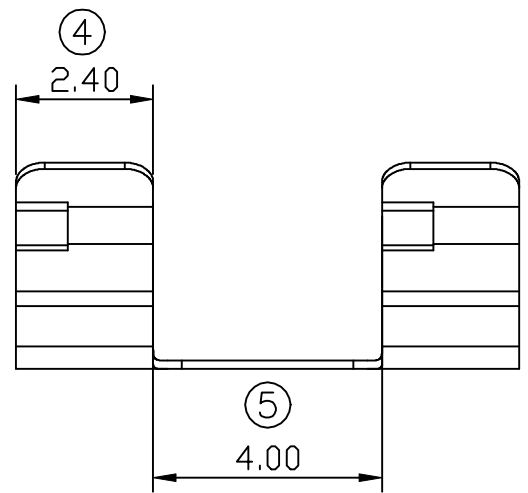

RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)

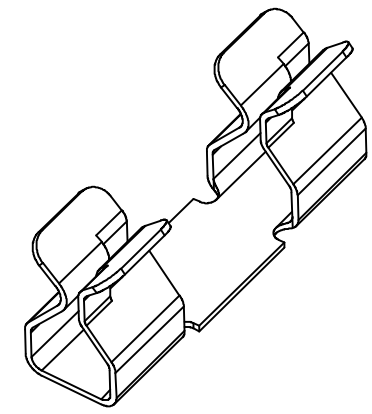

Note:

1. Material: Stainless steel Thickness 0.15mm
2. Electroplate:
Matte Sn over all
Nickel underplating over all
3. Operating Temperature: -20℃~+85℃
4. Recommended conditions shielding cover 0.30~0.50mm

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30<- ≤120	±0.15	0.20	0.30
120<- ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

00	01/26-'11	Design creation	
REV	Date	Description	
DRAFT	Timmy Lai	DATE	01/26-'11
CHECKER	Benedick Liang	DATE	01/26-'11
APPROVAL	Jacky Lin	DATE	01/26-'11
		SHEET	1-2
		SCALE	Not to scale
		UNIT	mm
EMISTOP		CUS P/N	
SUL-35A2M			