
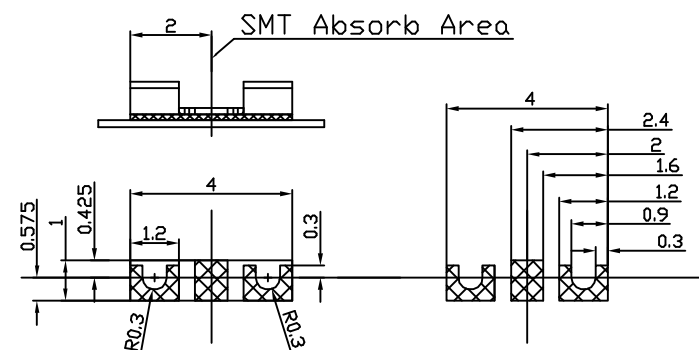
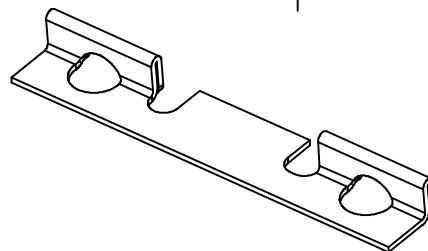

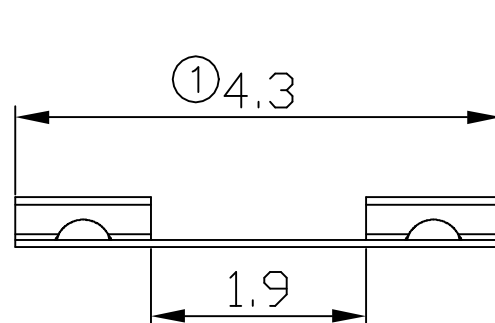


00 12/15-'14

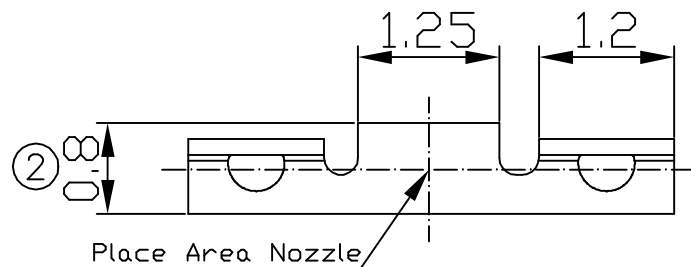

RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)

Note:

1. Material: Stainless steel Thickness 0.06mm
2. Electroplate:
Matte Sn over all
Nickel underplating over all
3. Operating Temperature: -20℃~+85℃
4. Suggest shielding cover thickness 0.15mm or 0.2mm, height less than 1.5mm

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30<- ≤120	±0.15	0.20	0.30
120<- ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

00	12/15-'14	Design creation			
REV	Date	Description			
DRAFT	Jacky Lin	DATE	12/15-'14	RoHS Compatible	
CHECKER	Justin Wu	DATE	12/15-'14		
APPROVAL	Jacky Lin	DATE	12/15-'14		
SHEET	1-2	SCALE	Not to scale	UNIT	mm
EMI STOP				EMI STOP CORP.	
EMISTOP				CUS P/N	
SML-04M					