

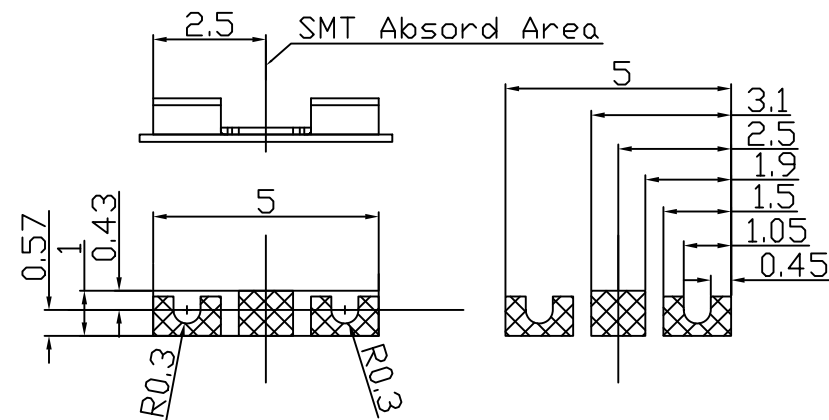
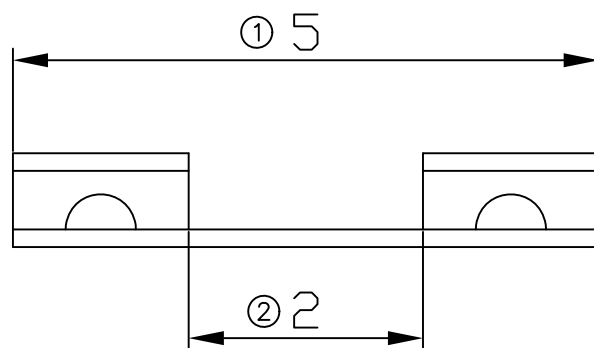
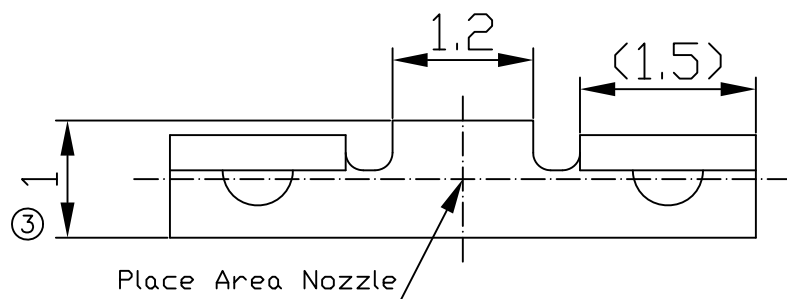


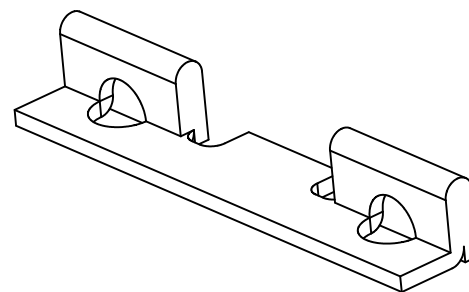

RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)



Note:

1. Material: Stainless steel Thickness 0.15mm
2. Electroplate:
Matte Sn over all
Nickel underplating over all
3. Operating Temperature: $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$
4. Suggest shielding cover thickness 0.15mm or 0.2mm,
height less than 1.5mm

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30<- ≤120	±0.15	0.20	0.30
120<- ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

00	11/21-'12	Design creation				
REV	Date	Description				
DRAFT	Jacky Lin	DATE	11/21-'12	RoHS Compatible		
CHECKER	Gabby Wong	DATE	11/21-'12			
APPROVAL	Jacky Lin	DATE	11/21-'12	SHEET	SCALE	UNIT
				1-2	Not to scale	mm
 EMI STOP CORP.						
EMISTOP SML-08M				CUS P/N		