

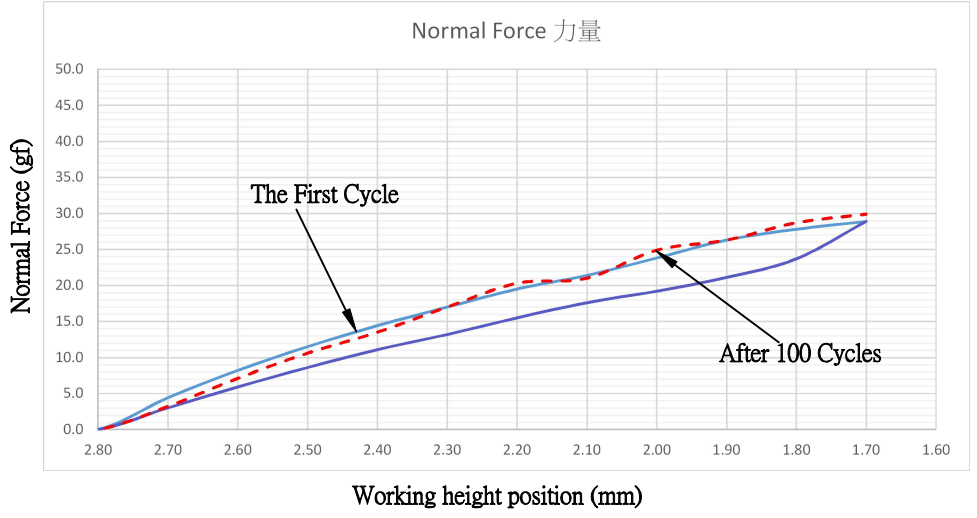


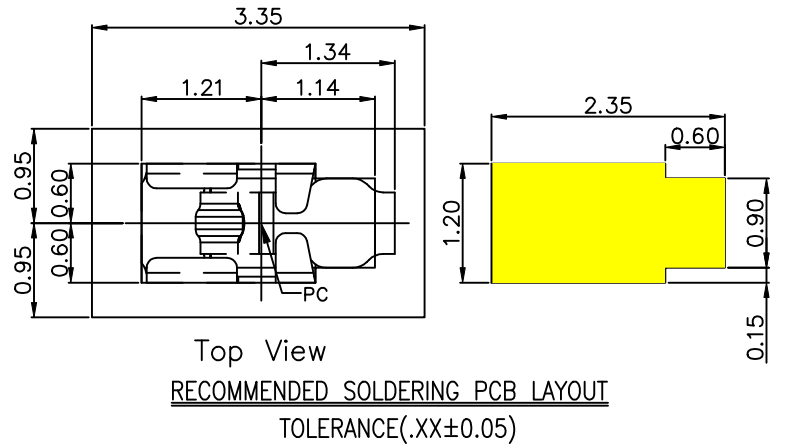

Note:

- 1.Material: Stainless Steel Thickness 0.06 mm
- 2.Eleetroplate: Nickel underplating over all.
Au >1u" gold plating on contact area.
- 3.Electrical Characteristics:
 - a. Current Voltage: 12V
 - b. Current Rate: 3A
 - c. Contact Resistance; Normal Compression <50mΩ
- 4.Working Height of Application: 2.50~1.70mm
- 5.Operating Temperature: -20℃~+85℃

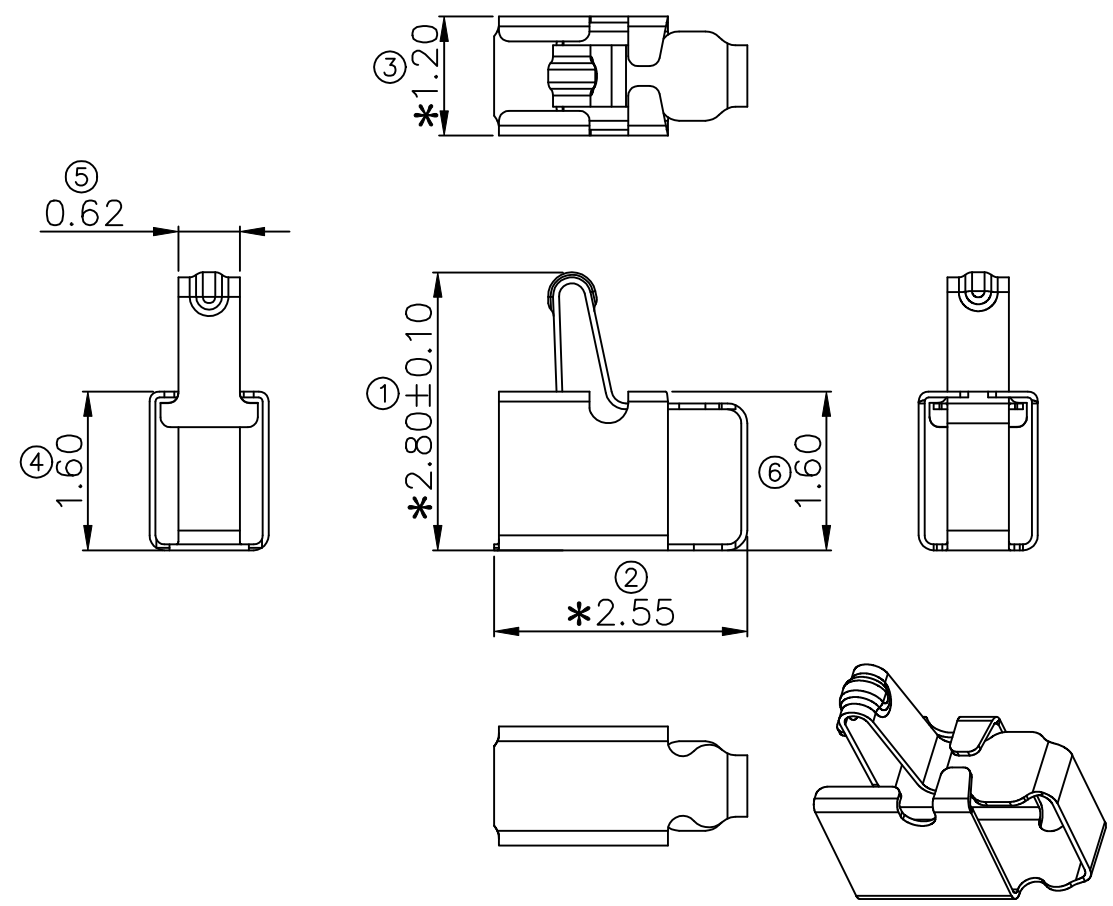

00	2025-11-17	Design Creation			
DRAFT		DATE		RoHS Compatible	
Peter Ting		2025-11-17			
CHECKER		DATE			
Robin Liao		2025-11-18			
APPROVAL		DATE		SHEET	
Justin Wu		2025-11-20		1-2	
				SCALE	UNIT
				Not to scale	mm
 EMI STOP CORP.					
EMISTOP P/N				CUS P/N	
LQT-28A1G				REV	

TOLERANCE/CLASS			
RANGE(mm)	A	B	C
≤30	±0.10	0.15	0.20
30< ~ ≤120	±0.15	0.20	0.30
120< ~ ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		