
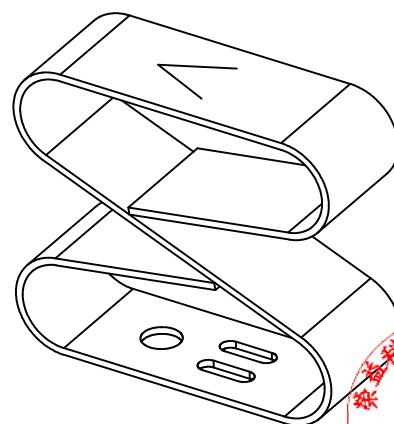
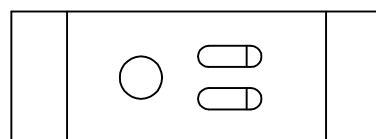
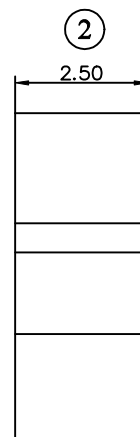



Top View
RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)

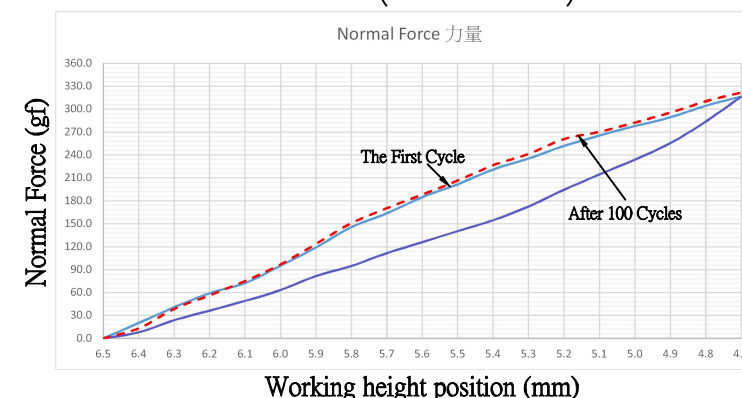

Note:

1. **Material:** Titanium Copper **Thickness** 0.15 mm
2. **Electroplate:** Nickel underplating over all, Gold Flash over all.
3. **Electrical Characteristics:**
 a. **Current Voltage:** 12V
 b. **Current Rate:** 3A
 c. **Contact Resistance; Normal Compression** <30mΩ
4. **Working Height of Application:** 4.7~5.6 mm
5. **Spring Force Tolerance** is ±20gf
6. **Operating Temperature:** -20°C ~ +85°C

TOLERANCE/CLASS			
RANGE(mm)	A	B	C
≤30	±0.10	0.15	0.3
30 < ~ ≤120	±0.15	0.20	0.4
120 < ~ ≤300	±0.20	0.30	0.50
300 <	±0.30	0.50	0.80
ANGLES	±2.5°		

00	2022-09-15	Design Creation				
DRAFT Lydia Tsai		DATE 2023-01-03	RoHS Compatible			
CHECKER Justin Wu		DATE 2023-01-03				
APPROVAL Timothy Chen		DATE 2023-01-04	SHEET 1-2	SCALE Not to scale	UNIT mm	



EMI STOP

EMI STOP CORP.

0	EMISTOP P/N
0	S8-6202G

CUS	P/N
-----	-----