

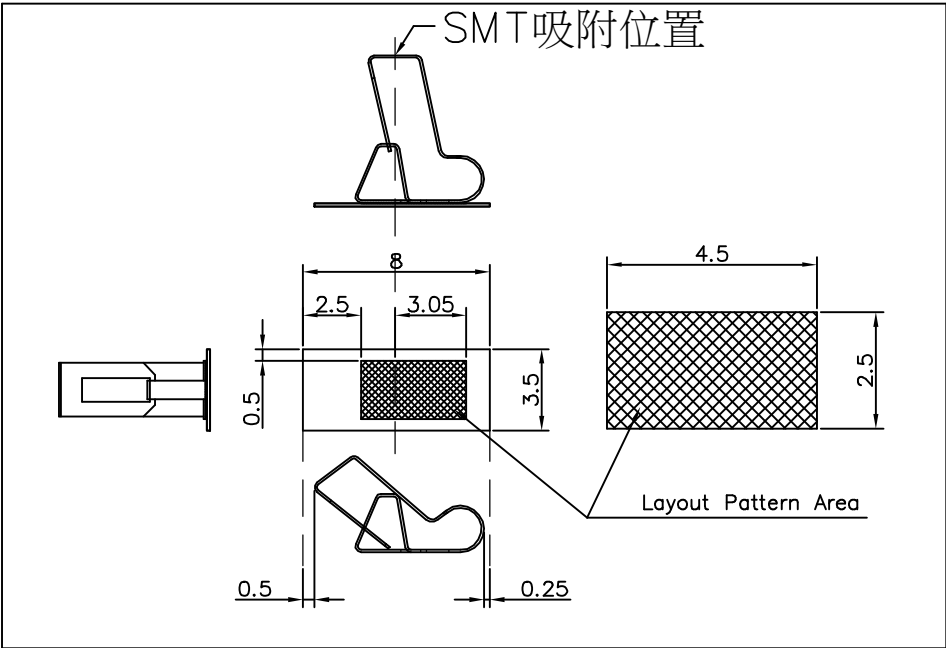


	1	2	3	4	5	6	7	8	
A									A
B									B
C									C
D									D
E									E
F									F
	1	2	3	4	5	6	7	8	

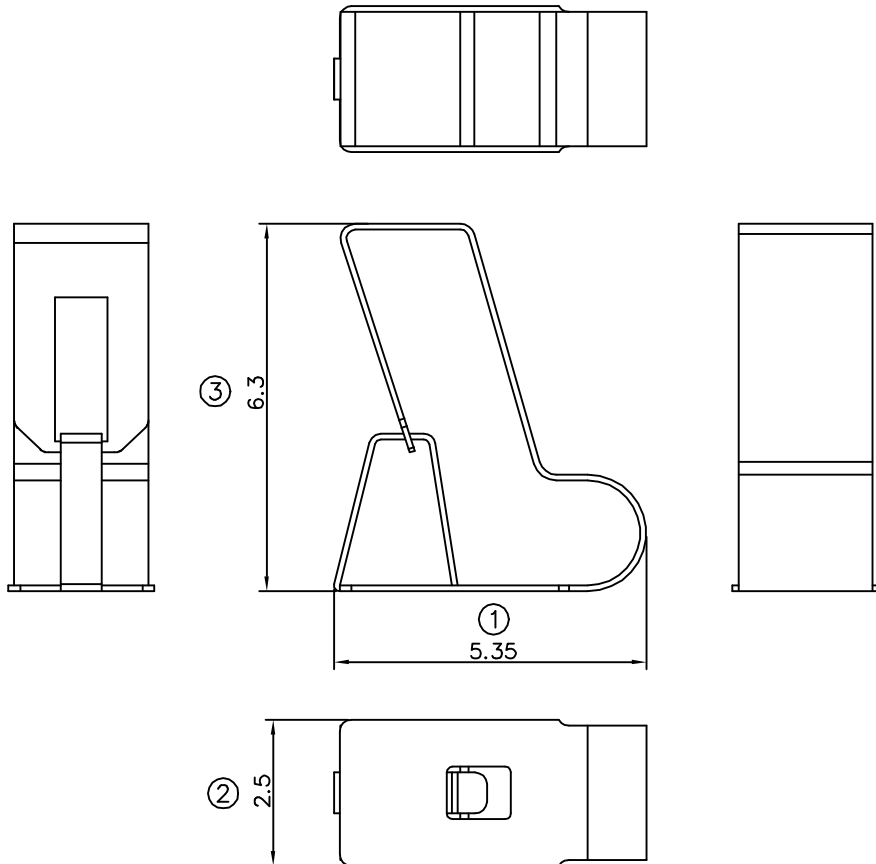

PCB Recommend Layout Pattern

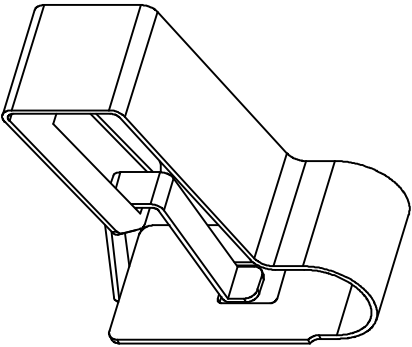

- Note:
1. Material: Copper Alloy Thickness 0.10mm
 2. Electroplate:
Au >1u"
Nickel underplating over all
 3. Electrical Characteristics:
3-1 Current Voltage: 12V
3-2 Current Rate: 3A
3-3 Contact Resistance: Normal Compression<30mΩ
 4. Working Height of Application: 4.0~5.8 mm
 5. Spring Force Tolerance is ±20gf
 6. Operating Temperature: -20℃~+85℃

TOLERANCE/CLASS			
RANGE(mm)	A	B	C
≤30	±0.10	0.15	0.20
30< ~ ≤120	±0.15	0.20	0.30
120< ~ ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

00	09/21-'20	Design creation		
DRAFT	Benny Lin	DATE	09/21-'20	RoHS Compatible
CHECKER	Justin Wu	DATE	09/21-'20	
APPROVAL	Jacky Lin	DATE	09/21-'20	
		SHEET	1-2	SCALE
			Not to scale	UNIT
			mm	
EMI STOP EMI STOP CORP.				
EMISTOP P/N			CUS P/N	
SQ-63Q2G				